

Technical Data Sheet

TERRAWET® Special Coating G 9/221 FoodSafe-050

Water-based Gloss Coating with Excellent Drying for Non-Absorbent Substrates

ACTEGA Terra GmbH

Industriestraße 12, 31275 Lehrte DE

+49 5132 5009-0

DownloadTDS.ACTEGA.Terra@altana.com

www.actega.com

Product Description

Water-based gloss coating with excellent drying for non absorbent surfaces.

The coating belongs to our FoodSafe series. FoodSafe is our portfolio of water-based coatings for the direct food contact, as a minimum to dry and fat-including foodstuffs. These coatings have a low potential for migration and they do not contain undesirable constitutional components such as mineral oils (MOSH, MOAH), heavy metals or phthalates. They are compliant with the Framework Regulation EU No. 1935/2004 and the Plastics Directive EU No. 10/2011 (PIM). They also correspond to the Swiss Ordinance (SR 817.023.21) as well as to the Good Manufacturing Practice Regulation (EC) No. 2023/2006.

This product has been assessed against the criteria of the Material Health category in the Cradle to Cradle Certified™ Product Standard and was awarded a Gold level Material Health Certificate by the Cradle to Cradle Products Innovation Institute.

General Information	
Product Type	Coatings
Product Technology	Water based
Field Of Application	Paperbased Packaging, Labels, Displays, Food direct, Other non-food, Food indirect, Frozen food packaging, Dry foodstuff packagings, Detergent packaging, Beverages
Properties	Has proven itself as a coating for the rearside of board., Temporary barrier against fat and water

Technical Data Sheet

TERRAWET® Special Coating G 9/221 FoodSafe-050

Water-based Gloss Coating with Excellent Drying for Non-Absorbent Substrates

ACTEGA Terra GmbH

Industriestraße 12, 31275 Lehrte DE

+49 5132 5009-0

DownloadTDS.ACTEGA.Terra@altana.com

www.actega.com

Application Method

- Sheet-fed offset, coating unit (chambered doctor blade or roller system)
- Wet-on-dry
- Wet-in-wet
- Flexo, pre-print
- Flexo, reel-to-reel
- Stir well before use! Mechanical stirring is recommended.
- Please use printing inks/foil inks suitable for coating.
- The full profile of characteristics of the coating film is available after complete drying.
- Using non-absorbent substrates and / or slowly absorbent printing inks, we recommend to plan for the corresponding drying times.
- Recommended coating application: 3,5 - 5 g/m²/wet
- Recommended pile temperature: not > 35°C
- There must be a sufficient hardening of the overall system substrate-printing ink-coating before further processing which should be checked in the process.
- We recommend to omit adhesive straps.
- For the further processing of the sheets under mechanical load and/or the influence of humidity, a sufficient high basic consistency of the substrate is required.
- Resistance against alkali, alcohol and solvents should be given according to DIN ISO 2836, formerly DIN 16524, in order to exclude a change of colour.
- In order to guarantee a fast and complete drying, we recommend a sufficient airing of the sheets.
- The coating is suitable for wrapping in foils XS and MS (no acrylic coated foil).
- There must be a suitability for water-based coating if anti-set-off powder is used (do not use mineral powder).

Substrate Recommendation

- Two-sided PE-coated board
- Rearside PE coated board
- Aluminum foil laminated substrates
- Coated Paper
- Metallized substrates
- Coated Board
- PVC, PP, PE, PET foils etc.

Technical Data Sheet

TERRAWET® Special Coating G 9/221 FoodSafe-050

Water-based Gloss Coating with Excellent Drying for Non-Absorbent Substrates

ACTEGA Terra GmbH

Industriestraße 12, 31275 Lehrte DE


+49 5132 5009-0

DownloadTDS.ACTEGA.Terra@altana.com

www.actega.com

Properties

- Gloss
- Scuff Resistance
- Hot Foil Stamping
- Crackling Tolerance
- Foaming Tolerance
- Drying
- Two Sided Coating
- Wet Block Resistance
- UV Varnishing
- Counter Glueing
- Foil Laminator

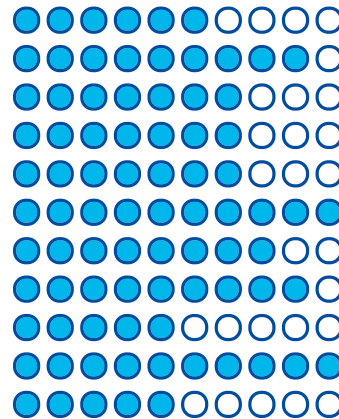

Product Characteristics			
Viscosity	• ~50 s (20°C, DIN 4 mm cup)		
Hot Foil Stamping	<input checked="" type="checkbox"/>	Glueability	<input type="checkbox"/>
Slip Angle	14° - 20°	Heat Resistance	Up to 200°C
Anti Penetration	<input type="checkbox"/>		

Storage Instructions

- Shelf-life 18 months
- Applies to closed original containers at 5°C up to 30°C.
- Protect from frost, heat and sun exposure.
- Storage may cause a change in viscosity. We recommend to check the viscosity and adjust - if necessary - with water.
- Avoid mixing with other coatings or washing water.

Cleaning Instructions

- Please clean machines and tools immediately with water. Dried coating residues can be removed with TERRAWET Clean Cleaning Agent G 12/181.

Technical Data Sheet

TERRAWET® Special Coating G 9/221 FoodSafe-050

Water-based Gloss Coating with Excellent Drying for Non-Absorbent Substrates

ACTEGA Terra GmbH

Industriestraße 12, 31275 Lehrte DE

+49 5132 5009-0

DownloadTDS.ACTEGA.Terra@altana.com

www.actega.com

Disclaimer

The characteristics contained herein constitute binding product specifications which we warrant provided the conditions and testing methods mentioned therein are used. Any other subjective or objective requirements concerning the products are excluded. Any information herein about suitability, use or application of the products is non-binding and does not constitute a commitment regarding the products' properties, use or application. We recommend that you test our products in preliminary trials to determine their suitability for your intended purpose prior to use. No warranties of merchantability or fitness for a particular purpose are made regarding any products mentioned herein and data or information set forth, or that such products, data or information may be used without infringing intellectual property rights of third parties.